

6085 (SN)

FMVSS 121 rated for 20,000 lbs.

ABEX Standard Grade Offering

Preferred by an industry that demands the best.

Abex 6085 is a high performance, standard grade brake lining with reliable stopping power and good lining life.

INTRODUCING

FLEETRITE ABEX

NEW BRAKES

FLTSN4707QPK - \$40.00

WITH EXCHANGE



PRODUCT PROFILE

- FMVSS 121 rated for 20,000 lbs.
- 165 AL Factor (30 x 5.5)
- Standard Grade
- Crack resistant
- Copper free
- Low swell and growth
- Good fade, recovery and retardation
- Good lining life and drum life
- Manufactured in ISO TS 16949 certified plants
- Superior flexural strength and modulus of elasticity to resist cracking
- Excellent stopping power


FMVSS 121
BRAKE STANDARD*
Typical Dynamometer Plot

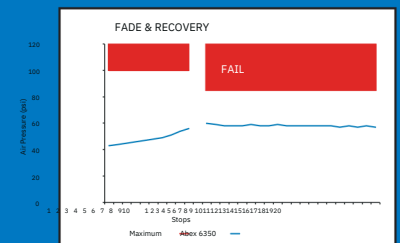
Test Parameters:

- Brake – Meritor 16.5 x 7 Q Plus
- Axle Load – 20,000 lbs.
- AL Factor – 165 (30 x 5.5)

*Tested internally by Link-certified dynamometer.

APPLICATIONS

 Tandem Tractor/Trailer	 Spread Tandem	 Multiple Trailer	 Single Tractor/Trailer	 Straight Truck
 Container Chassis	 Livestock Trailer	 Car Hauler	 Dry Bulk	 Tanker
 Flat Bed Trailer	 Van Trailer	 Logging Trailer	 Single Axle Dump	 Tandem Axle Dump
 Refuse Truck	 Tandem Axle Mixer	 School Bus		



For years, cracked brake shoes were considered an expected outcome, simply the cost of doing business. Until Abex stepped up. We created the premium friction that has significantly reduced cracked brake shoes. Of course, this reduces downtime and your total CPM. So ask for the genuine Abex friction. Because there's no substitute for smart business.

To learn more, visit us at www.drivheavydutyparts.com



PRICES GOOD THROUGH 12/31/2025

©2023 ABEX is a trademark of DRIV Automotive Inc. or one of its affiliates.



6350 (SX)

FMVSS 121 rated for 23,000 lbs.

ABEX Standard Grade Offering

Preferred by an industry that demands the best.

Abex 6350 is a high performance, standard grade brake lining with reliable stopping power and good lining life.

INTRODUCING

FLEETRITE ABEX

NEW BRAKES

FLTSX4707QPK - \$43.00

WITH EXCHANGE



PRODUCT PROFILE

- FMVSS 121 rated for 23,000 lbs.
- 165 AL Factor (30 x 5.5)
- Standard Grade
- Crack resistant
- Copper free
- Low swell and growth
- Good fade, recovery and retardation
- Good lining life and drum life
- Manufactured in ISO TS 16949 certified plants
- Superior flexural strength and modulus of elasticity to resist cracking
- Excellent stopping power




FMVSS 121
BRAKE STANDARD*
Typical Dynamometer Plot



Test Parameters:

- Brake – Meritor 16.5 x 7 Q Plus
- Axle Load – 23,000 lbs.
- AL Factor – 165 (30 x 5.5)

*Tested internally by Link-certified dynamometer.

APPLICATIONS

 Tandem Tractor/Trailer	 Spread Tandem	 Multiple Trailer	 Single Tractor/Trailer	 Straight Truck
 Container Chassis	 Livestock Trailer	 Car Hauler	 Dry Bulk	 Tanker
 Flat Bed Trailer	 Van Trailer	 Logging Trailer	 Single Axle Dump	 Tandem Axle Dump
 Refuse Truck	 Tandem Axle Mixer	 School Bus	 Fire Truck	



For years, cracked brake shoes were considered an expected outcome, simply the cost of doing business. Until Abex stepped up. We created the premium friction that has significantly reduced cracked brake shoes. Of course, this reduces downtime and your total CPM. So ask for the genuine Abex friction. Because there's no substitute for smart business.

To learn more, visit us at www.drivheavydutyparts.com



PRICES GOOD THROUGH 12/31/2025

©2023 ABEX is a trademark of DRIV Automotive Inc. or one of its affiliates. AB231063

